
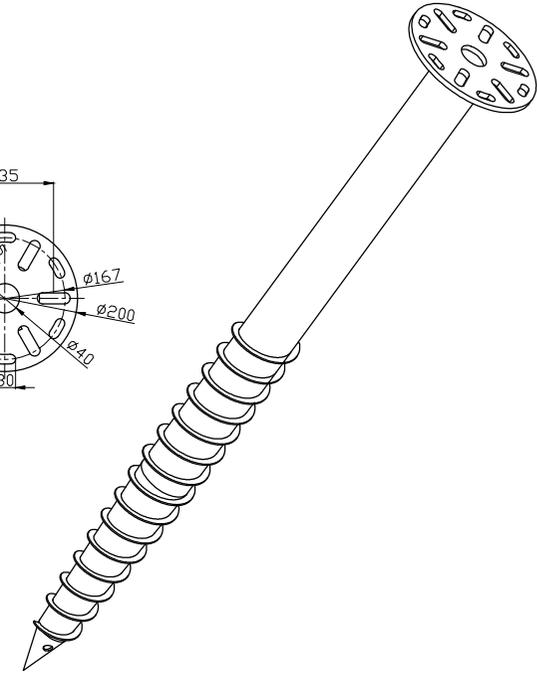



WORKING COPY
THROWN AWAY AFTER USE

This document is Shenzhen Suneco Techno Int'l Co.,Ltd. and shall not without Shenzhen Suneco Techno Int'l Co.,Ltd. written permission be copied, imparted to third party or used for any unauthorized purpose.

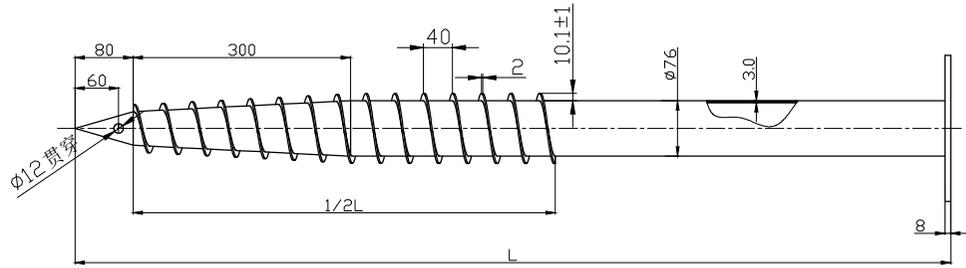

- 1、材質: Q235Bスチール Material:Q235B Steel.
 - 2、中国初! 日本製DIPSOLメッキ薬剤使用、耐久性が一番! 溶融亜鉛メッキ処理、膜厚は85um以上!
China First! Hot dipped galvanized treatment used of Japanese DIPSOL plating drug. durability is best.
 - 3、割れなきこと、溶接線は均一、バリ取り No distortion, No sharp edge.
 - 4、公差は明記なき箇所は「GB/T19804-C」クラスに準ずること。穴位置ズレ: ±1mm、穴直径は0.5mmとする
Tolerance: According to class "c" if not written. Hole position: ±1mm, Hole dia 0.5mm
- ※「単本杭の引抜方向への載荷試験」をクリアしています。(データは別途ご参照)

明記なき公差は: GB/T19804-Cに準じること。
TOLERANCE UNLESS OTHERWISE SPECIFIED GB/T19804-C.

寸法・クラス (mm)	A	B	C	D
0~30mm	±0.05	±0.10	±0.20	±0.30
30~60mm	±0.10	±0.15	±0.30	±0.40
60~150mm	±0.15	±0.20	±0.40	±0.50
150~300mm	±0.25	±0.30	±0.50	±0.60
300mm Above	±0.30	±0.40	±0.60	±0.70

■仕様表 (SPEC)

NO	Model	L (mm)	Weighty (kg)
01	SS-76-1000-66	1000	7.3
02	SS-76-1200-66	1200	8.4
03	SS-76-1600-66	1600	10.7
04	SS-76-1800-66	1800	11.9
05	SS-76-2000-66	2000	13.1
06	SS-76-2500-66	2500	15.2

B	No	Changes and/or note no.-nr	Date	Change By

Scale	Drawn by	Project	Weight	kg	Volume	l
N.S.T		GROUND SCREW WITH FLANGE				
Date	App by		Code		Sheet	of
2015-07-24						
Shenzhen Suneco Techno Int'l Co.,Ltd.			Draw. no.		Rev.	